

Your # 1 Source for Magnetic Contacts

CONTACT

DIMENSIONS


SPECIAL FEATURES

REPLACES

SURFACE MOUNT



945/949



945/949


Surface Mount Magnetic Contact with Leads

- 15 foot zip cord leads standard
- Standard gap: 1-1/4"
- Choose self adhesive (945), or screw mount (949)
- Pkg. quantity=5/bag

- Sentrol 1035
- GRI 100-12,110-12
- Nascom N35
- Tane FM106
- Aleph PS1541



945T




945T

Mini Surface Mount with Screw Terminals


- Screw mount or adhesive mount
- Screw terminals eliminate wire splicing and soldering
- Standard gap: 1-1/8"

- Sentrol 1038T
- GRI 100T,110T
- Tane-60
- Aleph DC-2531

AVAILABLE
IN
AMMO BOX

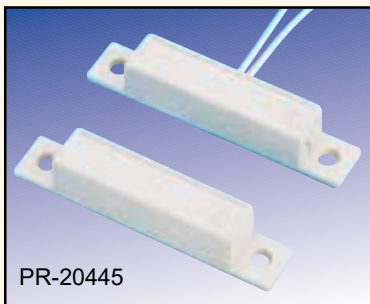

PR-20445



PR-20445


Mini Surface Mount with Leads

- Miniature size for cleaner look
- Standard gap: 1-1/4"
- 18" long wire leads
- Screw mount or adhesive mount


- Sentrol 1085,1032
- GRI 110-12
- Nascom N35
- Tane FM106
- Aleph PS1541

AVAILABLE
IN
AMMO BOX

COMMERCIAL

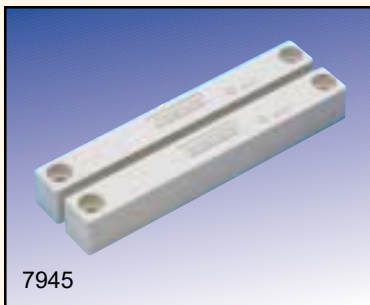

7945




7945


XTP Surface Mount Magnetic Contact with Leads

- XTP contacts withstand surges up to 2400 volts DC
- 6' CLIJ cable is standard
- Epoxy sealed
- Wide gap of 2.5"
- Available in SPDT (7945-2GY)
- Pkg. quantity=1/bag

- Sentrol 1045
- GRI 400,410
- Amseco AMS37

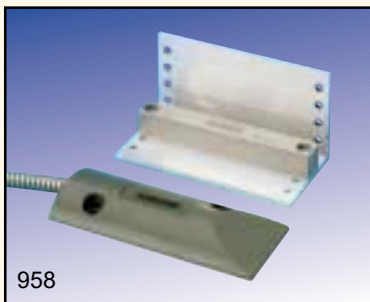

958



958

Overhead Door Magnetic Contact

- Adjustable magnet with L-bracket
- 24" armored cable is standard
- Standard gap: 2-3/8"
- Epoxy sealed for protection from moisture and impact
- Available in SPDT (958-2)
- Pkg. quantity=1/bag

- Amseco ODC59A
- Sentrol 2202AU,2202A
- GRI 4532/4532L

ALL MODELS:
Specify color: White (WH), Brown (BR), Gray (GY)

Your # 1 Source for Magnetic Contacts

COMMERCIAL


RECESSED

CONTACT


DIMENSIONS

SPECIAL FEATURES

REPLACES

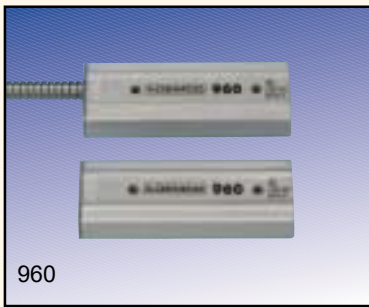


960




960 XTP Surface Mount Magnetic Contact

- XTP contacts withstand surges up to 2400 volts DC
- Epoxy Sealed
- 3' armored cable is standard
- Wide gap of 2.5"
- Available in SPDT (960-2)
- Pkg. quantity=1/bag

- Sentrol 2505A
- GRI 4400
- Nascom 505A

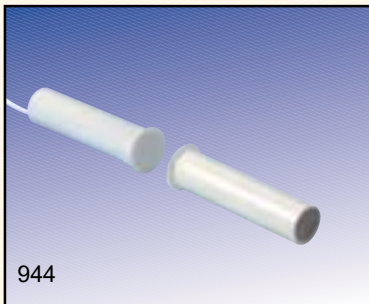

944




944 3/8" Diameter Recessed Contact

- Standard gap: 3/4"
- Convenient 5' zip cord leads are standard
- Available in SPDT (944-2GY)


• PR-20411 for PRO version with 18" leads

- Sentrol 1075
- GRI 2020-12
- Nascom N-75
- Tane TAP-10
- Aleph DC-1621

AVAILABLE
IN
ANMO BOX

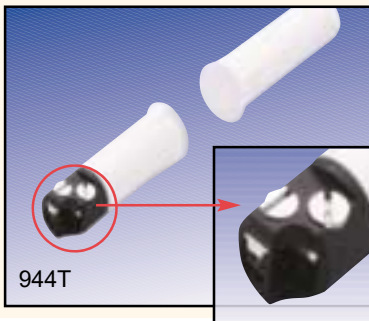

944T




944T 3/8" Diameter Recessed Contact with Screw Terminals


- 3/8" diameter press fit design
- Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver
- Standard gap: 3/4"

- Sentrol 1125T
- GRI 2020T
- Aleph DC-3621
- Tane-3/8T

AVAILABLE
IN
ANMO BOX

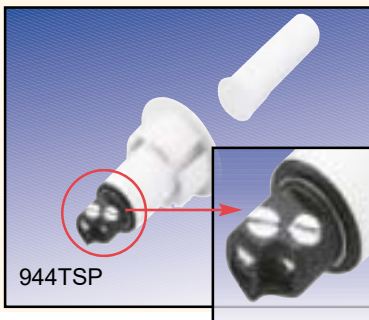

944TSP




944TSP 3/4" Recessed Contact with 3/8" Magnet


- 3/4" diameter switch for easier wiring...3/8" diameter magnet
- Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver
- Standard gap: 3/4"
- Available with 5' leads (944SP)

- GRI 120T-12

AVAILABLE
IN
ANMO BOX

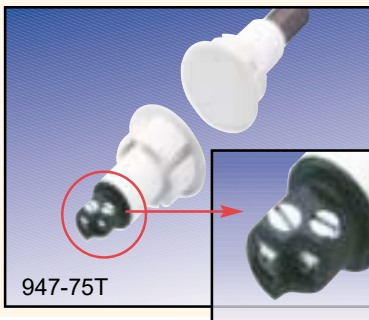

947-75T



947-75T 3/4" Diameter Steel Door Contact with Terminals

- Standard gap: 1/2" in steel
- Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver
- Order 947-75 for 5' leads

- Sentrol 1078CT
- GRI 8080-T
- Tane 3/4 TC

AVAILABLE
IN
ANMO BOX

ALL MODELS:
Specify color: White (WH), Brown (BR), Gray (GY)

Your # 1 Source for Magnetic Contacts

RECESSED

CONTACT


DIMENSIONS

SPECIAL FEATURES

REPLACES



951




- 951**
3/8" Diameter Mini Recessed Contact
- With magnet only 1/2" long, the 951 is ideal for casement windows, sliding windows and other thin frame applications
 - Standard gap: 7/16"
 - 5' zip cord leads are standard


• PR-20451 for PRO version with 18" leads

- Sentrol 1125
- GRI 20RS-12
- Nascom N-175N
- Tane STB-10
- Aleph DC-1651

AVAILABLE
IN
AMMO BOX

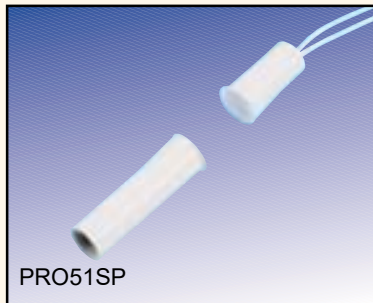

PRO51SP




- PRO51SP**
"Stubby" Press Fit Recessed Magnetic Contact with Wide Gap


- Stubby 3/8" diameter switch with extra length magnet
- Standard gap: up to 3/4"
- 18" Leads

- GRI 5065
- Aleph PS-1650

AVAILABLE
IN
AMMO BOX

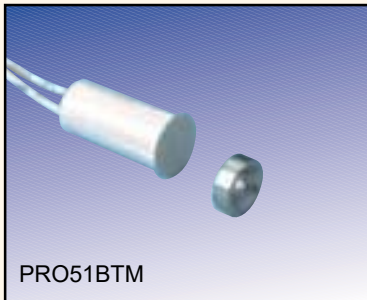


PRO51BTM




- PRO51BTM**
3/8" "Stubby" Recessed Contact with Rare Earth Button Magnet

- "Stubby" 3/8" press fit with button magnet
- Powerful rare earth magnet is easy to install with screw or adhesive
- Standard gap: 1/2"
- Pkg. quantity=5/bag

- Sentrol R-1125
- GRI N-20RS-12
- Tane STB-10DM

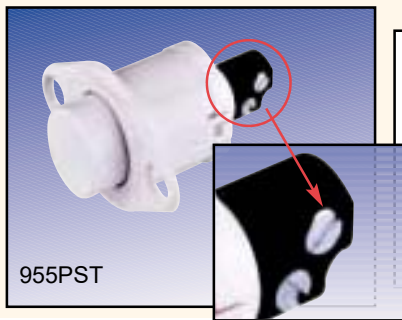

955PST




- 955PST**
3/4" Recessed Plunger Switch

- Fast and easy to install
- Perfect for internal doors... wide range of applications
- Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screwdriver


• Order 955PS for 18" leads

- Sentrol 3015
- GRI PBF-100T
- Tane PB-52T

AVAILABLE
IN
AMMO BOX

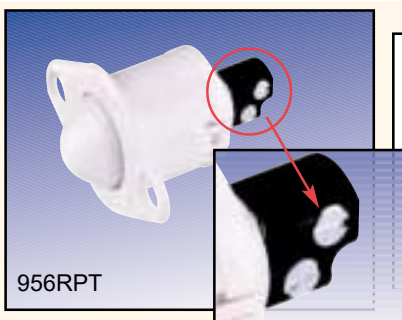

956RPT



- 956RPT**
3/4" Recessed Roller Plunger Switch

- Fast and easy to install
- Perfect for internal doors... wide range of applications
- Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screwdriver

• Order 956RP for 18" leads

- Sentrol 3005,3008
- GRI DS-01T
- Tane RB-32

AVAILABLE
IN
AMMO BOX

L/MAGCHT/D

ALL MODELS:
 Specify color: White (WH), Brown (BR), Gray (GY)

Your # 1 Source for Magnetic Contacts

CONTACT

DIMENSIONS


SPECIAL FEATURES

REPLACES

SURFACE MOUNT



7939



7939

Surface Mount Magnetic Contact

- Standard gap: 1.0"
- Spacers, covers and screws included
- Cover conceals end of line resistor (EOL)
- Available in SPDT (7939-2) and wide gap (7939W)


- PR-20439 WH or BR for PRO version

- Sentrol 1085T, 1285T
- GRI 29A
- Nascom N-85T
- Tane SM35
- Aleph DC2541

AVAILABLE
IN
AMMO BOX



7940




7940

Universal Surface/Recessed Mount


- Screw mount, adhesive mount or recessed
- Wide gap: 2", recessed: 1"
- Unique quick wire connections – just insert wires and tighten – no stripping or soldering
- Recessed adaptors included

- Sentrol 1038T
- Amseco AMS51
- Tane- 50

AVAILABLE
IN
AMMO BOX

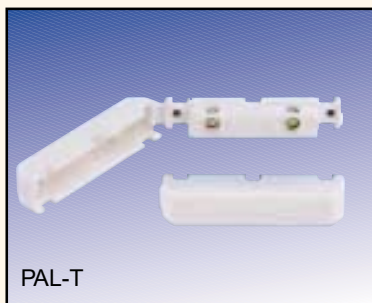

PAL-T



PAL-T


Surface Mount Magnetic Contact

- Unique snap open case cover – no loose parts
- Concealed screw terminals eliminate splicing and soldering
- Super 1-1/8" gap makes installation a snap
- Screw mount or adhesive mount
- 6 wire entry points for mounting versatility


- PAL-WH or BR for 5ft. leads

- Sentrol 1038T
- GRI 100T, 110T
- Tane- 60
- Aleph DC-2531

AVAILABLE
IN
AMMO BOX

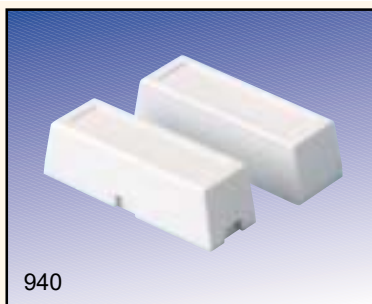

940




940

Surface Mount Magnetic Contact


- Attractive cover keeps mounting screws, terminal screws, or EOL resistor hidden
- Standard gap: 3/4"
- Complete with spacers and mounting screws

- Sentrol 1085T
- GRI 29A, 129A
- Nascom N285T
- Aleph PS-1523

AVAILABLE
IN
AMMO BOX

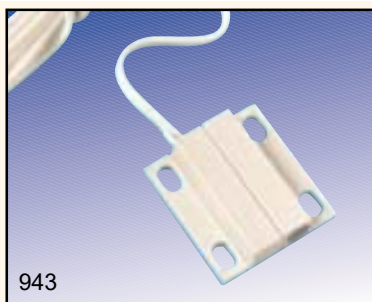

943



943

Mini Surface Mount with Leads

- Self adhesive or screw mount
- Flange snaps off for even smaller adhesive mount switch
- 5' zip cord leads standard (943)
- Standard gap: 1/2"

- PR-20443 for PRO version (no logo and 18" leads)

- Sentrol 1145
- GRI 50F-12
- Nascom N25

AVAILABLE
IN
AMMO BOX

ALL MODELS:
Specify color: White (WH), Brown (BR), Gray (GY)