

IPC321E-DIR-F36(60)-IN 1.3MP WDR

Vandal-resistant Network IR Fixed Dome Camera



Key Features

Optics

- Day/night functionality
- Up to 120 dB WDR (Wide Dynamic Range)
- Smart IR, up to 30 m (98 ft) IR distance
- 3D DNR (Digital Noise Reduction)

Compression

- Dual streams
- ROI (Region of Interest)
- Customized OSD

Network

- NAA (Network Auto-Adaptability) to cope with up to 5% network packet loss
- UNP(Universal Network Passport) patented technology for NAT traversal
- Dual direct-to-iSCSI data block storage
- ONVIF Conformance


Structure

- Wide temperature range: -35°C to 60°C (-31°F to 140°F)
- Wide voltage range of $\pm 25\%$
- IK10 vandal resistant
- IP66-rated


Specifications

Camera	IPC321E-IR-F36-IN		IPC321E-IR-F60-IN
Sensor	1/3", 1.3Megapixel, progressive scan CMOS		
Shutter	Auto/Manual, 1/6~1/8000 s		
Lens	3.6 mm	6 mm	
Angle of View (H)	78°	48°	
Day/Night	IR-cut filter with auto switch (ICR)		
Min. Illumination	Color: 0.06 Lux (F1.6, 50IRE) Black & White: 0.03Lux (F1.6, 50IRE)		
S/N	>50dB		
Image Rotation	Support		
WDR	120 dB		
Video			
Max. Resolution	1280 × 960		
Video Compression	H.264, MJPEG		
Frame Rate	960P (1280*960) 30 fps; 720P (1280*720) 30 fps; D1 (720*576) 25 fps		
Video Streaming	Dual		
OSD	Up to 8 OSDs		
Privacy Mask	Up to 4 areas		
Audio			
Audio Compression	G.711		
Two-way Talking	Support		
Storage			
Back-end Storage	Dual direct-to-iSCSI data block storage		
Network			
Protocols	L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP,Qos,NTP,FTP,HTTP,SNMP,SIP		
Compatible Integration	ONVIF, IMOS,API		
Interface			
Audio I/O	Input: impedance 35 kΩ; amplitude 2 V [p-p]		
	Output: impedance 600 Ω; amplitude 2 V [p-p]		
Alarm I/O	1 / 1		
Network	10M/100M Base-TX Ethernet		
General			
Power Supply	12 V DC, or PoE (IEEE802.3 af)		
	Power consumption: 3.5 W (with IR on: extra 2 W)		
Dimensions (Ø x H)	Φ109 x 81 mm (Ø4.3" x 3.2")		
Weight	0.45 kg (0.99 lb)		
Working Environment	-35°C ~ +60°C (-31°F ~ 140°F), Humidity ≤ 90% RH(non-condensing)		
Vandal Resistant	IK10		
Ingress Protection	IP66		

Dimensions

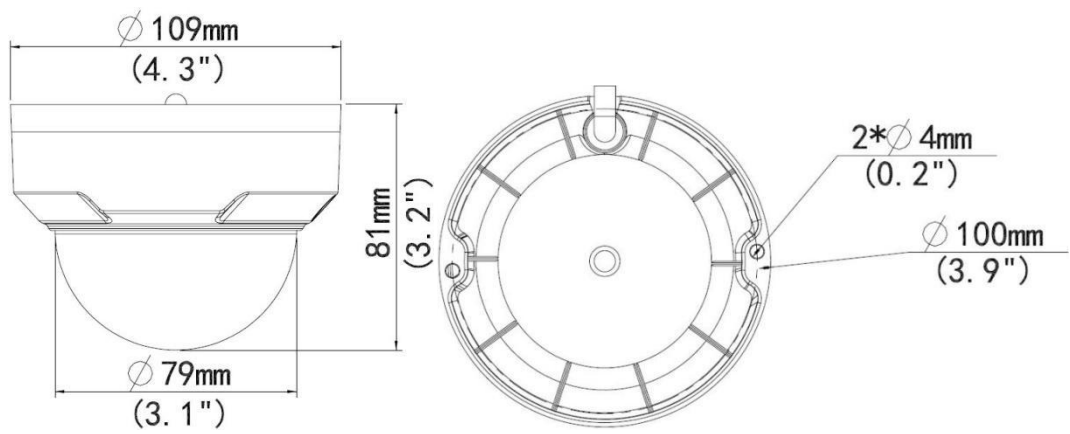

Installation



Ceiling mount

Accessories

Installation mode	Accessories	Description
Ceiling mount	Mounting pedestal is included in the Product package	/

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.